



Chris-Craft Hatch Gasket Installation for 20 inch round hatch



Gasket groove
installed into
channel to provide
better compression

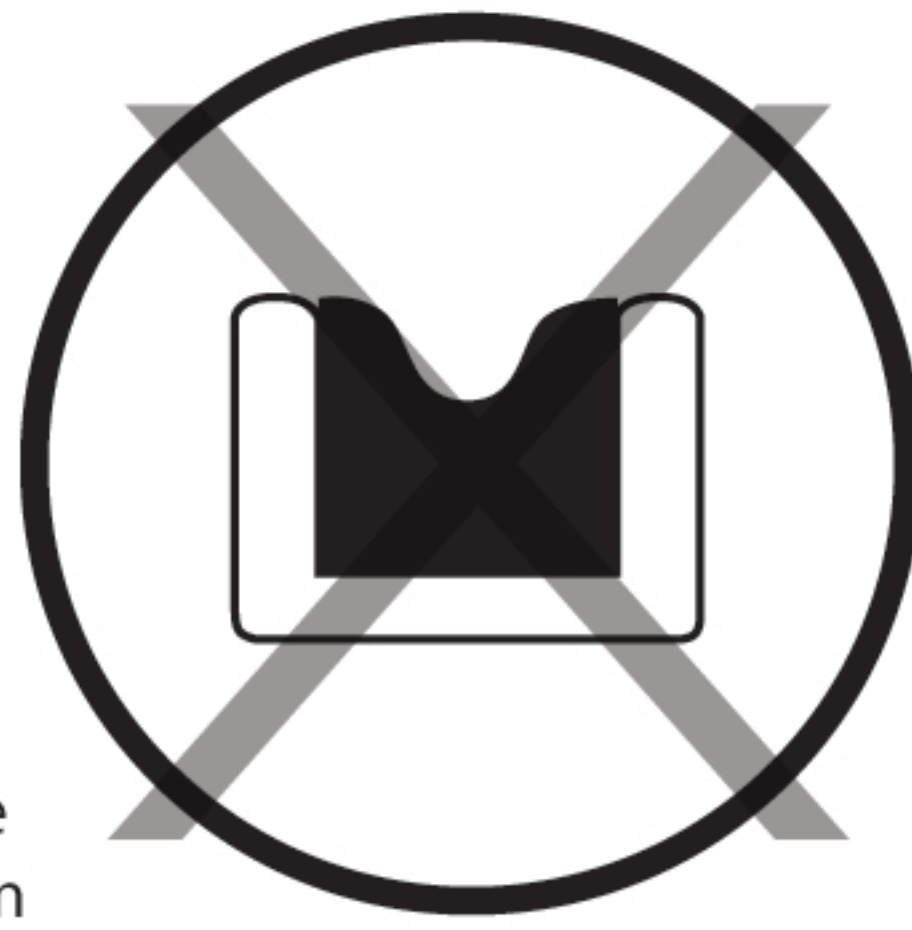

No

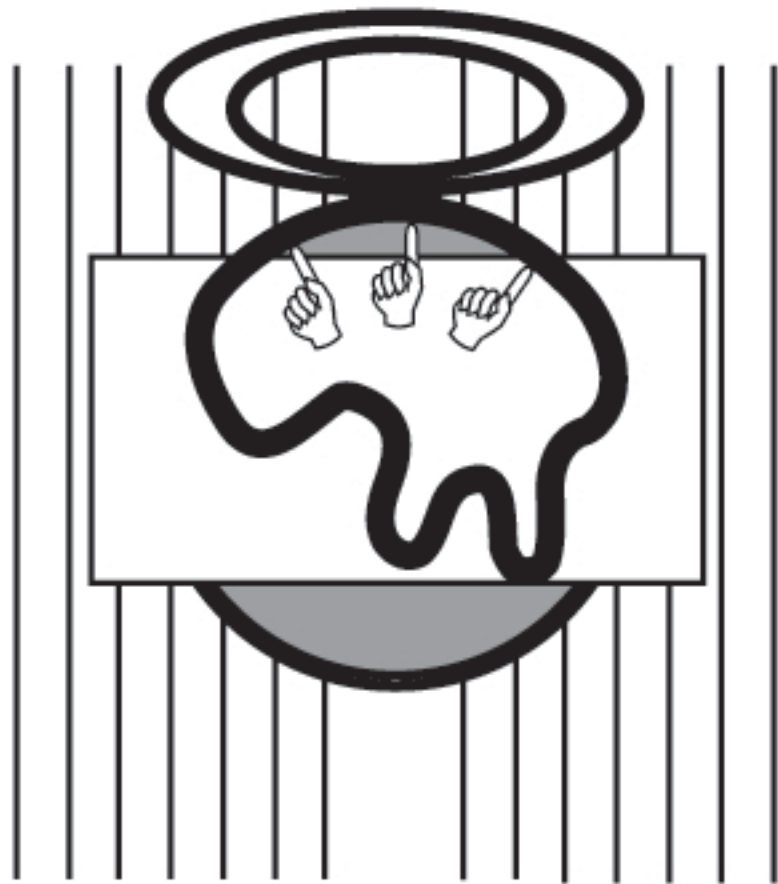

1

Unroll gasket,
place on scrap
cardboard.

Move cardboard
over hatch opening,
work gasket into
hatch channel.



2

Shift cardboard
and continue
working gasket
into channel.

Continue working
gasket into channel
until entire gasket
is in the channel.

Clean hatch deck channel by scraping with a narrow scraper or screw driver, then wire brush to remove old gasket and adhesive. Wipe channel with solvent and vacuum out dust.

Optional: If glueing new gasket into channel use marine grade urethane adhesive/sealant. Apply a single bead of adhesive into channel before installing gasket. After the new gasket is completely in the channel, close and secure hatch to hold new gasket in place until adhesive has cured.