



Chris-Craft Hatch Gasket Installation for 20 inch square hatch

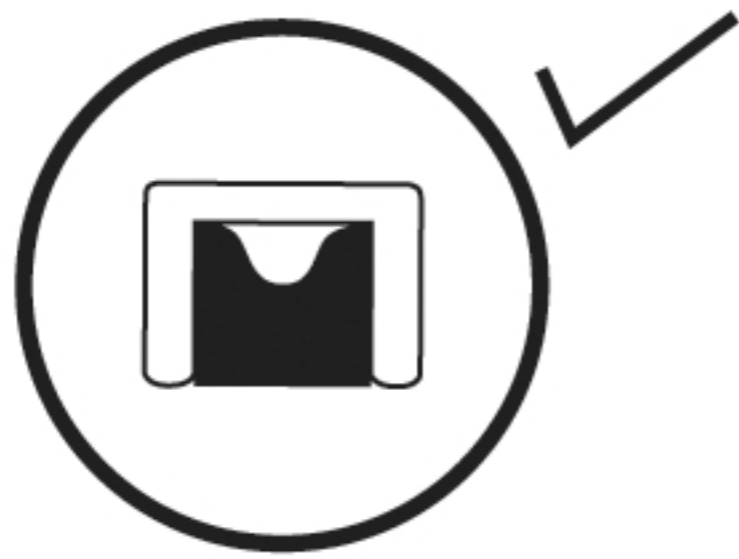

Gasket groove
installed into
channel to provide
better compression

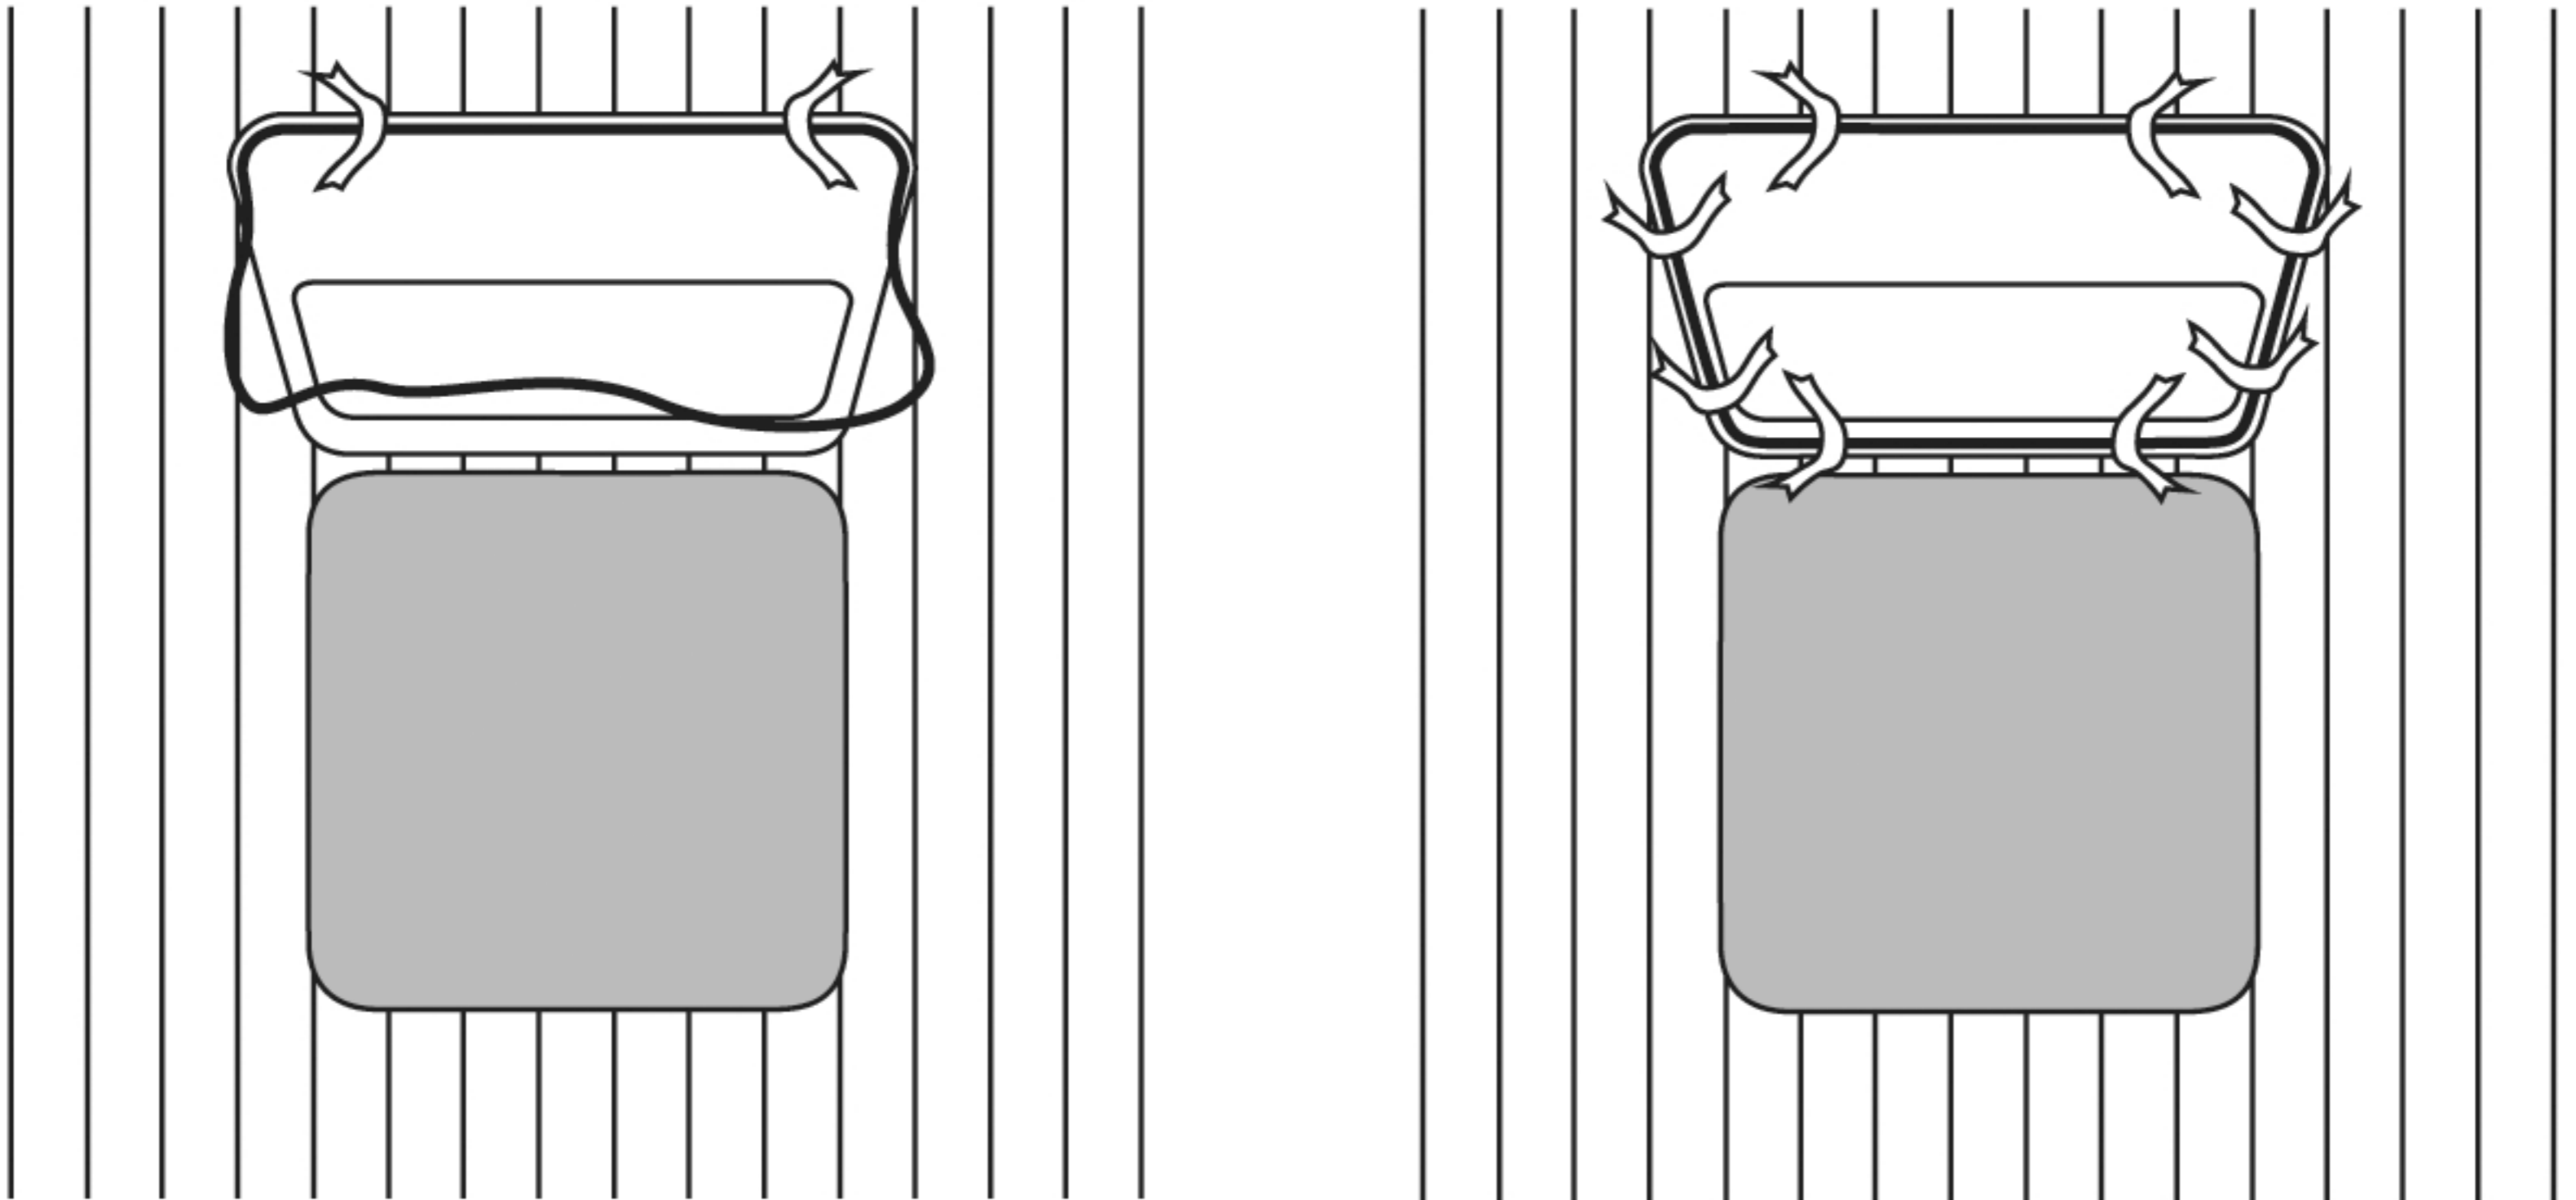

Remove screws from hatch support braces, lower braces out of the way. Lean hatch back and rest it on the deck. Clean hatch channel by scraping with a narrow scraper or screw driver, then wire brush to remove old gasket and adhesive. Use a marine grade urethane adhesive/sealant and apply a single bead into channel. Use tape to hold new gasket in place. Screw hatch support braces in place, close and secure hatch to hold gasket in place while adhesive sets. Inspect to make sure that gasket is properly centered in channel.